APA-3079

250W Flex ATX Power Supply

FEATURES

- Full-range AC input: 100 Vac-240 Vac
- Low ripple & noise output
- Support OVP, SCP and OCP
- Safety certifications:CE, FCC, UL, TUV, CB
- Dimensions: 81.5 x 40.5 x 150 (mm)

SPECIFICATION

Input Voltage	100 Vac-240 Vac
Wattage	250W
Form Factor	Flex ATX
MTBF(hrs)	100,000 @25°C
Temperature/Humidity	Operating: 0°C ~ 50°C, 85%RH Storage: -20°C ~ 80°C, 95%RH
EMC & Safety	CE, FCC, UL, TUV, CB
Dimension (WxHxD)	81.5 x 40.5 x 150 (mm)

DC OUTPUT

	+5V	+3.3V	+12V	-12V	+5Vsb
Max. Load	14A	12A	18A	0.3A	2.5A
	80W Max				
Min. Load	0.2A	0A	0.05A	0A	0A
Ripple	50mv	50mv	120mv	120mv	50mv

APJ-3048

500W Flex ATX Power Supply

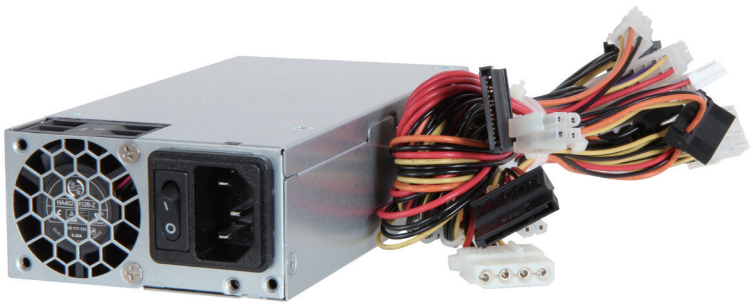

FEATURES

- Full-range AC input: 100 Vac-240 Vac
- Low ripple & noise output
- Support OVP, SCP, OCP and OTP
- Safety certifications: CE, FCC, UL, CSA, CB, TUV, CCC, BSMI, KC
- 80 PLUS® Gold Certified

SPECIFICATION

Input Voltage	100 Vac-240 Vac
Wattage	500W
Form Factor	Flex ATX
MTBF(hrs)	700,000 @25°C
Temperature/Humidity	Operating: 0°C ~ 50°C, 8%~90%RH Storage: -20°C ~ 80°C, 5%~90%RH
EMC & Safety	CE, FCC, UL, CSA, TUV, CCC, BSMI, KC
Dimension (WxHxD)	81.5 x 40.5 x 150 (mm)

DC OUTPUT

	+5V	+3.3V	+12V	-12V	+5Vsb
Max. Load	18A	15A	41.6A	0.3A	3A
	150W Max		500W Max	3.6W Max	15W Max
Min. Load	0A	0A	0A	0A	0A
Ripple	50mv	50mv	120mv	120mv	50mv