
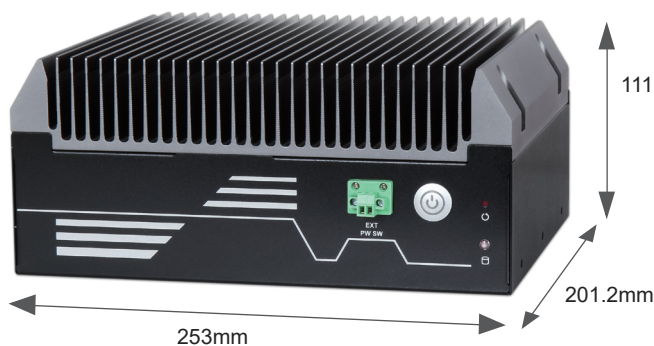


WEBS-45J1-BTL

Embedded Rugged Fan-less System with Intel® Core™ Processors (Series 2) and Intel® Core™ Processors (Series 2) with P-cores based Mini-ITX Board

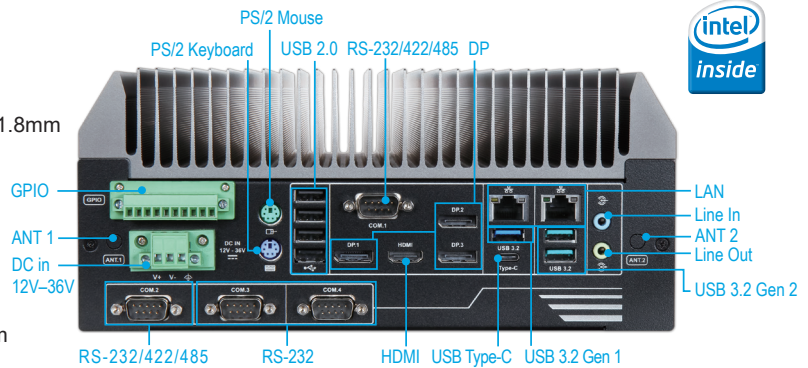

The WEBS-45J1-BTL builds on Intel® desktop Q670E chipset and takes advantages of Intel® Core™ Processors (Series 2) and Intel® Core™ Processors (Series 2) with P-cores technologies that can support dual DDR5 memory and 2x SATA Ports for storage. WEBS-45J1-BTL support two Gigabit Ethernet ports, one M.2 E Key socket, and one M.2 M Key socket. The WEBS-45J1-BTL is an ideal platform with rich I/O and high resolution for POS, kiosk, digital signage, and factory automation applications.

FEATURES

- Support Intel® Core™ Processors (Series 2) and Intel® Core™ Processors (Series 2) with P-cores
- Two SO-DIMM support DDR5 DRAM up to 96GB
- Support triple DP and one HDMI display
- Support one M.2 E Key socket and one M.2 M Key socket
- Support 4x COM ports (2x RS-232/422/485)
- 2x Antenna holes for WiFi module
- Optional preassembled with Hailo-8™ M.2 AI Acceleration Module (M key)

System

M/B	WADE-8213-Q670E
CPU	Supporting Intel® Core™ Processors (Series 2) and Intel® Core™ Processors (Series 2) with P-cores (LGA1700 socket, 45W TDP) <ul style="list-style-type: none"> - Intel® Core™ 9 273PTE - Intel® Core™ 7 253PTE - Intel® Core™ 7 251TE - Intel® Core™ 5 223PTE - Intel® Core™ 5 221TE - Intel® Core™ 5 213PTE - Intel® Core™ 5 211TE - Intel® Core™ 3 201TE
BIOS	AMI uEFI BIOS
Memory	-Supports two DDR5 dual channel up to 96GB SO-DIMM sockets
Storage	2x SATAIII ports
Watchdog Timer	Programmable watchdog timer
TPM	TPM2.0 (Optional)
H/W Status Monitor	System monitor (Voltage and Temperature)
Expansion	- 1x M.2 E Key 2230 with PCIe x1, CNVI for Wireless - 1x M.2 M Key 2242/2260/2280 with PCIe x4 and SATA3 for SSD

External I/O

Serial Port	4x COM ports (2x RS-232/422/485)
Display	- 3x DP, resolution up to 8K - 1x HDMI
USB	- 3x USB 3.2 Gen 2 (2x Type A + 1x Type C) - 1x USB 3.2 Gen 1 - 4x USB 2.0
Audio	Audio Jack with Line-out / Line-in with Realtek ALC897 Audio controller
Ethernet	- Intel® I210AT(1GbE) and Intel® I225LM(2.5GbE) Ethernet controller - 2x RJ45 connectors
GPIO	1x Programmable 8-bit Digital I/O
Other	- 2x Antenna holes for WiFi module - 1x EXT Power Switch

Power Supply Unit

Power Input	DC 12V ~ 36V with 3-pin Terminal Block Connector
-------------	--

Environmental

Operation Temperature	-20°C ~ 40°C
Storage Temperature	-40°C ~ 80°C
Relative Humidity	40°C, 95%RH non-condensing
Operation Vibration	1Grms/10-500Hz, IEC 60068-2-6
Operation Shock	50G, 11 msec, IEC 60068-2-27

Mechanical

Dimension	253 (W) x 201.2(D) x 111.8 (H) mm
Weight	5.25 Kg
Mounting	Wall mounting

